

HJT9B-FP




**FEATURES:**

- **Ultra Light Weight:** 1/3 of normal lead acid battery
- **Excellent Cycle Life:** Over 2000 cycles under JISD standard (lead acid battery only 300 cycles)
- **Premium Charge Acceptance:** Rechargeable with 10C current and 90% recharged within 6 minutes
- **Perfect Shelf Life:** Exceed one year (lead- acid battery 6 months)
- **Highly Safety:** LiFePO4 material and soft pack process ensure the safety performance
- **Multiple Position:** Any direction installation permit since no acid inside-non Spill and non leak
- **Maintenance Free:** 100% maintenance free after EX-WORK date
- **Environment Friendly:** No pollution, no acid, no lead, no heavy metal


**SPECIFICATION**

Nominal Voltage: (V)	12.8
Capacity(C10,25°C): (Ah)	≥3.0Ah *90%
Weight: (kg)	Approx. 0.7
Charging Current: (A)	STD.: 1.5A; MAX.: 15.0A
Charging Voltage: (V)	14.4±0.5V
High Rate Discharge: (64A, 25°C)	5s Voltage ≥10.0V, 90s Voltage ≥7.2V
High Rate Discharge: (64A, 0°C)	5s Voltage ≥8.5V, 90s Voltage ≥7.2V
CCA Tested by Digital Tester: (A)	180
Operating Temperature Range	Charge: 0~45°C
	Discharge: -10~60°C
	Storage: -20~40°C
Cycle Life:	≥1000 (100% DOD)
Self Discharge:	Battery can be stored for more than 12 months at 25°C (for higher temperature the self discharge will be faster). Check the battery voltage before using, recharge it if battery voltage less than 12.8V.


**Charge Characteristic**

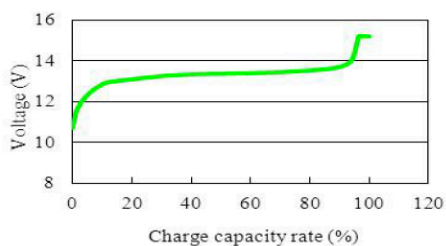


**Cycle Life**

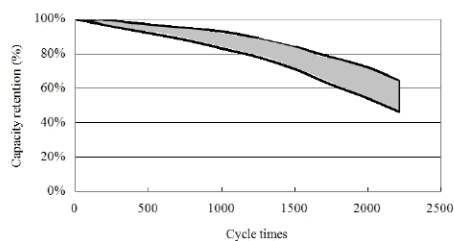


**Battery Drawing (±2mm): L150 X W65 X H92**

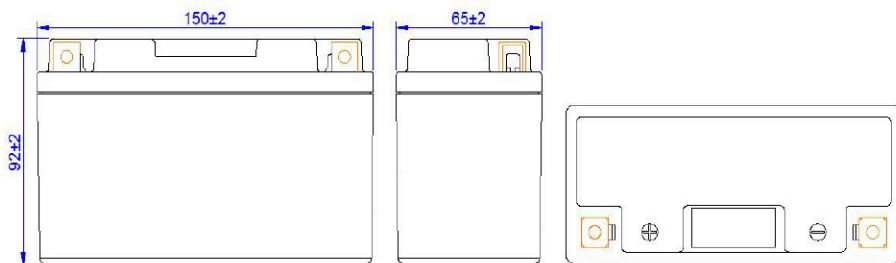

**Terminal Drawing:**



**Screw and Nut Drawing:**



**Manufacturer Certificate:**

TS16949; ISO9001; IS14001; ISO18001

**Product Certificate:**

UL1642 cell inside; CE; RoHs; UN38.3