



## Yuasa Technical Data Sheet

### Yuasa YBX3056 - YBX3000 SMF Batteries

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

Voltage	12V
Capacity (20-hour)	36Ah
Cold Cranking Amps (EN1)	330A

#### Dimensions

Length	187mm
Width	135mm
Height	227mm



#### Weights & Measures

Mean Weight with Acid	9.3kg
-----------------------	-------

#### Container Features

Case Type	JIS B19 + B1
Hold Down	B1
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


#### Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	3A
Performance Marking	W3-C2-V2-E1


#### Terminal Type

##### T1/T3


Standard DIN Post




Remove T1 adapter for T3



#### Cell Assembly Layout

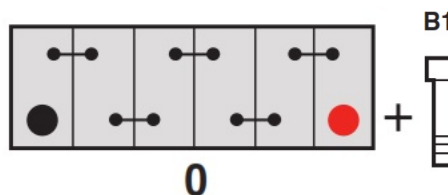

#### Battery Hold-down

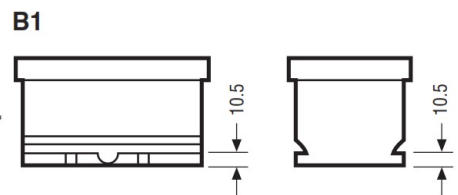

Data Sheet generated on 16/01/2025 – E&OE